


MMIC : FMM5056VF

5760.00MHz

2007年9月23日

入力 (dBm)	出力 (dBm)	消費電流 (A)	利得 (dB)
-13.87	21.13	1.35	35.00
-12.75	22.41		35.16
-11.74	23.40		35.14
-10.60	24.36		34.96
-9.57	25.30		34.87
-8.68	26.20		34.88
-7.67	27.20		34.87
-6.58	28.27		34.85
-5.57	29.19		34.76
-4.62	30.08		34.70
-3.64	31.00		34.64
-2.56	31.96		34.52
-1.56	32.67		34.23
-0.58	33.01		33.59
0.48	33.31	1.30	32.83
1.36	33.56		32.20
2.39	33.75		31.36
3.47	33.90		30.43
4.47	34.05	1.25	29.58
5.42	34.16		28.74
6.40	34.25		27.85
7.48	34.33		26.85
8.47	34.39		25.92
9.44	34.44		25.00
10.46	34.48		24.02

### MMIC : FMM5056VF

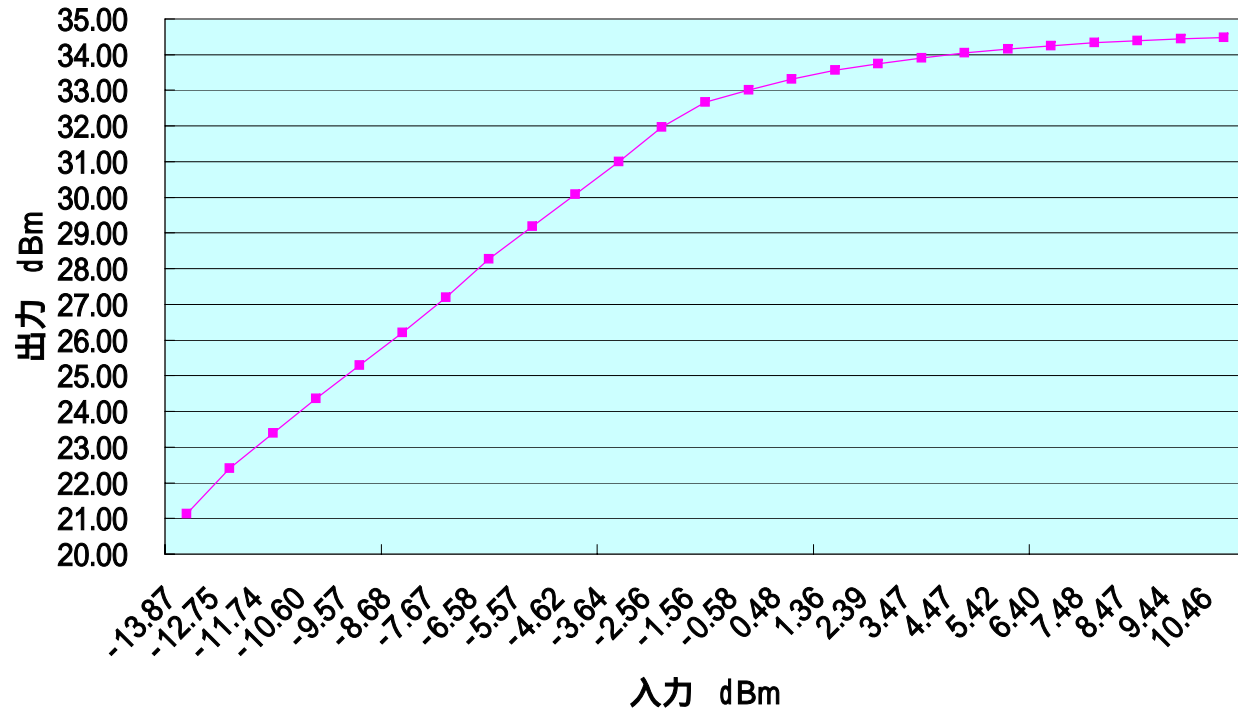

基板サイズ 24.8\*39.8\*0.8 mm (テフロン基板)

アルミケース 35\*46.5\*20 mm

Vd: +10.0V, 1.3A Vg1: -4.6V (7.5mA)

#### 周波数特性 MMIC 周波数: 5760.20MHz

	周波数 (GHz)	利得 (dB)
1	5.00	20.11
2	5.20	21.67
3	5.30	21.84
4	5.40	22.43
5	5.50	23.47
6	5.60	23.44
7	5.70	23.94
8	5.80	24.38
9	5.90	24.39
10	6.00	24.76
11	6.50	25.10
12	7.00	24.44
13	7.50	24.51
14	8.00	23.53

