
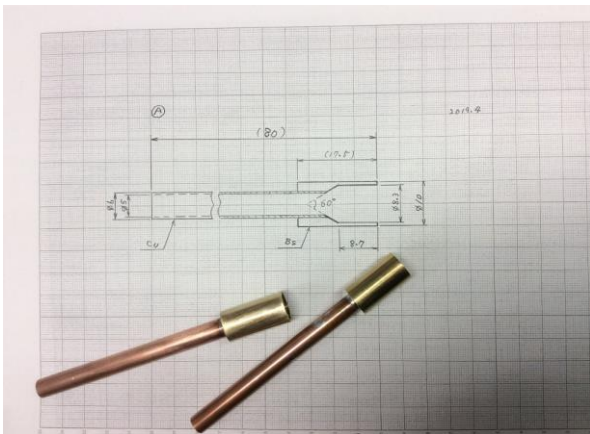


47GHz Dual Mode Horn

2019/04/12 JA10GZ金子

42.4/42.7=85.1度


度数	円形導波管5φ-V	-10dB幅 [dB]
60		
55	0.009	-20.87
50	0.045	-13.88
45	0.096	-10.59
40	0.18	-7.86
35	0.22	-6.99
30	0.25	-6.43
25	0.452	-3.86
20	0.57	-2.85
15	0.83	-1.22
10	0.9	-0.87
5	1	-0.41
0	1.1	0.00
-5	1.1	0.00
-10	0.98	-0.50
-15	0.75	-1.66
-20	0.62	-2.49
-25	0.44	-3.98
-30	0.247	-6.48
-35	0.22	-6.99
-40	0.12	-9.62
-45	0.08	-11.38
-50	0.046	-13.78
-55	0.009	-20.87
-60		

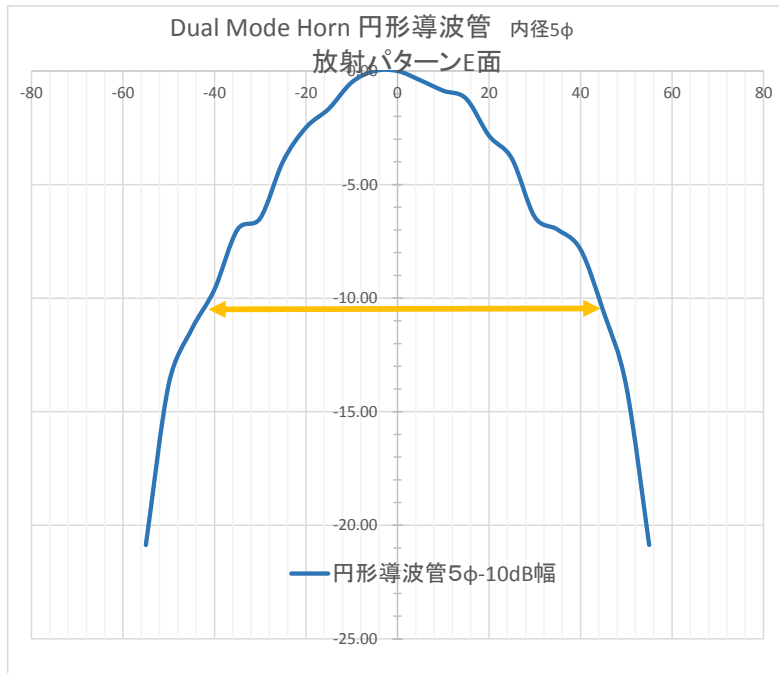

Dual mode Horn



47GHz 5dBm+25dBi Horn ANT

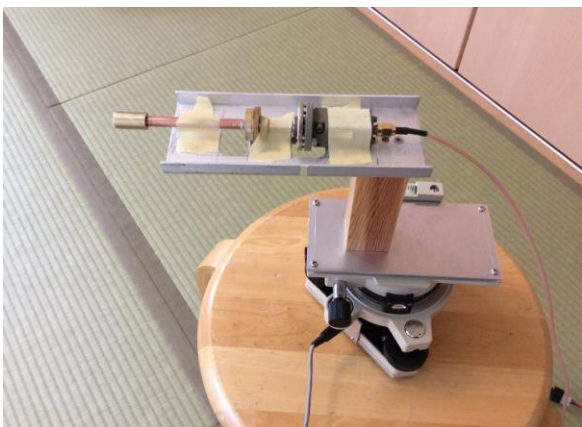

回転台 確度+/-0.5度